


funktel FC5 L

Personal emergency signal device for GAP-capable DECT stations and funktel multi-cell systems



- Emergency call button at the top and warning alarm button for dialling a predefined call number
- Integrated alarm sensors for position and tear-off alarm for automatic dialling of a further predefined call number
- Parameterisable pre-alarm (tone / vibration)
- IP 65 protection class: dust-tight and waterjet proof
- Drop resistant up to 1.8 meter
- Interchangeable Li-ion battery, screwfastened with up to 200 hours of standby time
- Abrasion-resistant, illuminated keypad
- blue.tooth for audio
- Covered socket for audio accessories
- HAC compatible – no audible interference on analog hearing aids
- Software update over-the-air in funktel DoIP systems

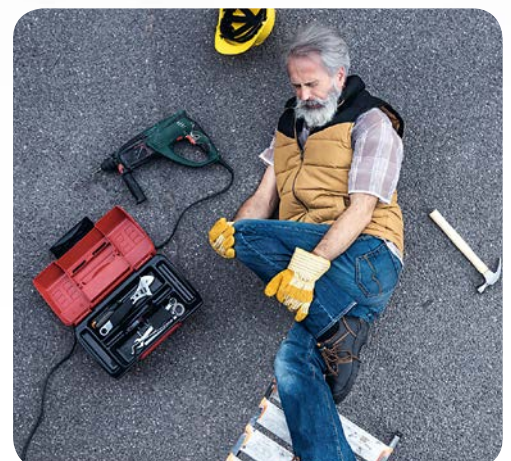

funktel FC5 L

DECT industrial handset with personal emergency call functions



Features

- Alarm via buttons:
 - ▶ Red, clearly accessible emergency call button
 - ▶ Warning alarm button on the side
 - ▶ Automatic dialling of emergency call number 1 with hands-free function
- Alarm via sensors
 - ▶ Position alarm via integrated position sensor
 - ▶ Loss alarm via cord tear-off
 - ▶ Automatic dialling of emergency number 2 with hands-free function
- Interchangeable Mem-Card
- IP 65 protection class: dust-tight and waterjet proof
- Robust housing
- Illuminated keypad, abrasion resistant
- High-quality acoustics
- Audio interfaces: blue.tooth and jack
- Vibration alarm

Optional accessories

- Individual and 6-bay charger for devices or batteries
- Flush-mounted charger for depot and locker systems
- USB programming tool
- MemCard
- Carrying accessories and cases
- Headsets and audio accessories

Technical data: funktel FC5 L DECT handset

Radio standard:	DECT™ (Digital Enhanced Cordless Telecommunications)
Frequency range:	1.88 ... 1.9 GHz
Transmission power:	Average: 10 mW, peak value: 250 mW
Dimensions:	142 x 46 x 31 mm (incl. clip)
Mass:	Approx. 140 g (incl. battery and clip)
Display:	2" TFT, 64 k colors, 176 x 220 pixels
Keypad:	Abrasion-resistant, illuminated Hardcaps with navigation rocker and softkeys
Address book:	500 local entries, each with name, 2 numbers and comment, central directory (system-dependent)
Call lists:	With 20 entries each for outgoing, received and missed calls
MemCard (optional):	MemCard slot (compatible with FC1 / FC4 / FC11, D3 / D11, and D5 / FC5)
Ring tone volume:	Max. 98 dB (SPL)*, with vibration
Handset operating life**	Talk-time: up to 20 hours Standby: up to 200 hours
Battery type:	Lithium-Ion, 1 200 mAh
Charging time:	Approx. 4 hours typically, approx. 7 hours with empty battery
Operating temperature:	Handset: -10 ... +55 °C Charger: +5 ... +40 °C
Storage temperature:	-25 ... +55 °C (short-term storage, max. 1 month) 0 ... +25 °C (max. 12 months)
Shipping temperature:	-20 ... +60 °C (with battery)
Protection class:	IP 65 (dust-proof and protected against jetted water)
Scope of supply:	Battery, MemCard, charger, plug-in power supply, clip
Part No.	5.010.780.500

Accessories for funktel FC5 L

Interchangeable battery:	Li-Ion, 1,200 mAh
Carry cases:	Various models – your dealer will be happy to advise

*) Depending on ringtone

**) With fully-charged battery, depending on system settings of the display illumination



Sturdy clip and discrete emergency call button

The sturdy, screw-fastened clip ensures that the funktel FC5 S always has optimal support. The discrete buttons for emergency and warning alarms offer a significantly higher level of safety.



MemCard

Network information and contact list data of older generation devices are copied automatically from the MemCard (optional) to the internal memory. This enables devices to be exchanged easily, even without the intervention of a technician.



funktel GmbH
Windmuehlenbergstr. 20-22
D-38259 Salzgitter

Phone: +49 - 53 41 - 22 35-0
Fax: +49 - 53 41 - 22 35-709
www.funktel.com

